

MODEL 600D

600 POUND DOUBLE MAGNETIC LOCK



- 600 POUND MINIMUM HOLDING FORCE PER LOCK
- MAGNET SIZE: 19-3/4" L x 1-7/8" H x 1" W
- ARMATURE SIZE: 7-1/4" L x 1-7/16" W x 5/8" D EACH
- 12 OR 24 VOLTS DC, JUMPER SELECTABLE
- 400 MA. @ 12 VDC, 200 MA. @ 24 VDC EACH LOCK
- CLEAR ANODIZED FINISH ON ALL ALUMINUM PARTS
- ALL NON-ALUMINUM PARTS PLATED
- AVAILABLE WITH BI-COLORED STATUS LED, BOND SENSOR & DOOR STATUS SENSOR



ALARM CONTROLS CORPORATION
19 BRANDYWINE DRIVE DEER PARK, NY 11729

1 631 586-4220 1 800 645-5538
WWW.ALARMCONTROLS.COM EMAIL INFO@ALARMCONTROLS.COM

MOUNTING BRACKETS

FOR EVERY INSTALLATION REQUIREMENT


MODELS AM 3300 & AM 6300

1/2" HEADER PLATES FOR MAGNETIC LOCKS

LOWERS MAGNETIC LOCK BY 1/2"

MODEL AM 3300
FOR 600 SERIES
1" W x 9 7/8" L

MODEL AM 6300
FOR 1200 SERIES
1 1/2" W x 10 1/2" L




MODEL AM 3331 & AM 6331

1/4" HEADER PLATES FOR DOUBLE LOCKS

LOWERS MAGNETIC LOCK BY 1/4"

MODEL AM 3331
FOR MODEL 600D SERIES

MODEL AM 6331
FOR MODEL 1200D SERIES




MODELS AM 3305 & AM 6305

5/8" HEADER PLATES FOR MAGNETIC LOCKS

LOWERS MAGNETIC LOCK BY 5/8"

MODEL AM 3305
FOR 600 SERIES
1" W x 9 7/8" L

MODEL AM 6305
FOR 1200 SERIES
1 1/2" W x 10 1/2" L




MODELS AM 3370 & AM 6370

3 PC. Z BRACKETS FOR SINGLE MAGNETIC LOCKS

FOR USE ON IN-SWINGING DOORS

MODEL AM 3370
FOR 600 SERIES

MODEL AM 6370
FOR 1200 SERIES

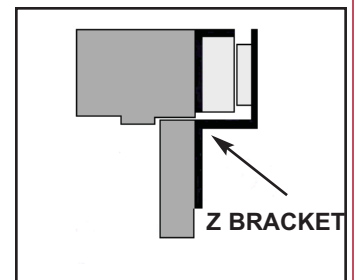

MODELS AM 1500, AM 3330 & AM 6330


1/4" HEADER PLATES FOR SINGLE LOCKS

LOWERS MAGNETIC LOCK BY 1/4"

MODEL AM 1500
FOR 300 SERIES
13/16" W x 6 11/16" L

MODEL AM 3330
FOR 600 SERIES
1" W x 9 7/8" L

MODEL AM 6330
FOR 1200 SERIES
1 1/2" W x 10 1/2" L




MODELS AM 3375 & AM 6375

3 PC. Z BRACKETS FOR DOUBLE MAGNETIC LOCKS

FOR USE ON IN-SWINGING DOORS

MODEL AM 3375
FOR 600 SERIES

MODEL AM 6375
FOR 1200 SERIES

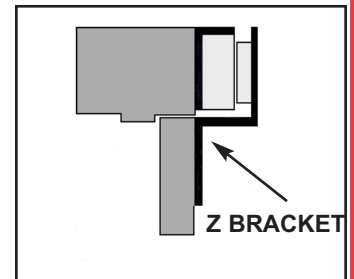

MOUNTING BRACKETS

FOR EVERY INSTALLATION REQUIREMENT

MODEL AM 3310 & AM 6310

ARMATURE HOUSINGS FOR MAGNETIC LOCKS


FOR USE ON FREEZER & EXTRA THICK DOORS

MODEL AM 3310 FOR 600 SERIES

2 1/8" W x 7 7/8" L x 9/16" H

MODEL AM 6310 FOR 1200 SERIES

3" W x 8 1/4" L x 9/16" H




MODEL AM 6320

ANGLE BRACKET FOR MAGNETIC LOCKS

USE TO EXTEND THE DOOR HEADER

FOR 600 AND 1200
SERIES MAGNETIC
LOCKS




MODELS AM 3325 & AM 6325

ADJUSTABLE ANGLE BRACKETS

USE TO EXTEND THE DOOR HEADER

MODEL AM 3325 FOR 600 SERIES

MODEL AM 6325 FOR 1200 SERIES




MODELS AM 6360 & AM 6361

FILLER PLATES FOR MAGNETIC LOCKS

USE WHEN DOOR STOP IS NARROW

MODEL AM 6360
FOR 600 & 1200 SERIES
3/4" W x 10 1/2" L x 5/8" H

MODEL AM 6361
FOR 600 & 1200 SERIES
1/2" W x 10 1/2" L x 1/2"




MODEL GDH

GLASS DOOR ARMATURE HOLDER

USE TO MOUNT ARMATURE ON GLASS DOOR

COMPRESSION MOUNTS
ARMATURE ON FRAMLESS
GLASS DOORS

ACCOMODATES
600 AND 1200 SERIES



MISCELLANEOUS PARTS

FOR 600 AND 1200 SERIES LOCKS

USE TO MOUNT ARMATURE ON THICK DOORS


LONG ARMATURE BOLT

MODEL AM 6340
SIZE: 8 MM x 2"
FLAT SOCKET HEAD

USE WHEN ADDITIONAL
ARMATURES ARE
NEEDED

MODEL AM 3335
FOR 600 SERIES


MODEL AM 6335
FOR 1200 SERIES



U.L. LISTED MAGNETIC LOCKS

FOR ALL ACCESS CONTROL APPLICATIONS

E-Z MOUNT DESIGN FOR SUPERIOR FASTENING

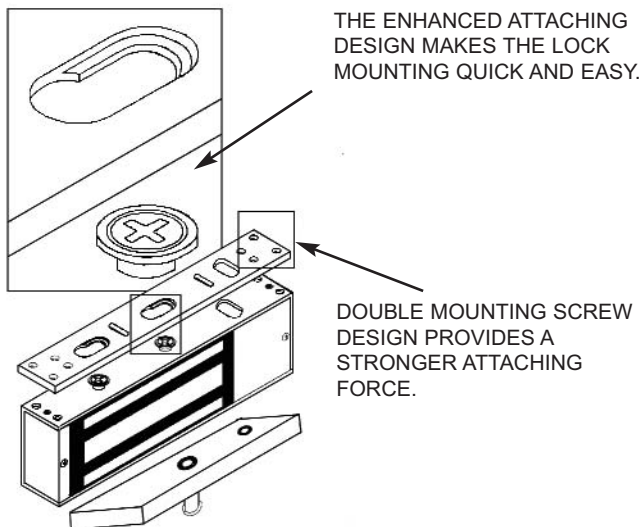

MODEL JBS-1/JBS-2 AUDIO INDICATOR MODULES



THIS MODULE WILL SOUND AS A MAGNETIC LOCK IS BEING UN-LOCKED. AFTER POWER IS REMOVED FROM LOCK, A THREE TO FIVE SECOND TONE WILL EMANATE FROM THE MODULE INSIDE THE LOCK INDICATING THAT THE LOCK IS UN-LOCKED. THIS MODULE WILL OPERATE ON THE STANDARD TWO WIRE CONNECTION TO THE LOCK. NO ADDITIONAL WIRING IS REQUIRED.

- JBS-1 FOR 1200 SERIES, JBS-2 FOR 600 SERIES
- SOUND LEVEL 80 db @ 3 FEET
- MODULE REPLACES EXISTING CIRCUIT BOARD
- VENTED COVER SUPPLIED

ALARM CONTROLS CORPORATION MAGNETIC LOCKS ARE MANUFACTURED TO RIGID STANDARDS AND ARE ASSEMBLED WITH THE FINEST MATERIALS AND WORKMANSHIP.

ALL MAGNETIC LOCKS HAVE A LIMITED LIFETIME WARRANTY, AND WILL BE REPAIRED OR REPLACED DUE TO DEFECTS IN MATERIAL OR WORKMANSHIP.

THE 600 AND 1200 SERIES MAGNETIC LOCKS ARE U.L. AND CANADA U.L. LISTED. THE LOCKS CONFORM TO U.L. 10B, 10C FOR USE ON SWINGING TYPE FIRE DOORS AND CONVENTIONAL DOORS. ALSO CLASSIFIED IN ACCORDANCE WITH UNIFORM BUILDING CODE STANDARD 7-2, FIRE TEST OF DOOR ASSEMBLIES.

A COMPLETE LINE OF STANDARD AND CUSTOM REQUEST TO EXIT STATIONS ARE AVAILABLE.

IMPORTANT FEATURES

- ALL MAGNETIC LOCKS HAVE A LIMITED LIFETIME WARRANTY
- MAGNETIC LOCKS ARE SUPPLIED WITH A THREAD LOCKING AGENT TO INSURE SECURE ATTACHMENT
- MAGNETIC LOCKS ARE SUPPLIED WITH BOTH WOOD SCREWS AND SELF-TAPPING SHEET METAL SCREWS
- ALL MAGNETIC LOCKS OPERATE ON 12 OR 24 VDC
- ALL MAGNETIC LOCKS HAVE A LOW CURRENT DRAW
- INSTANT RELEASE, NO RESIDUE MAGNETISM
- ALL NON-ALUMINUM PARTS ARE PLATED
- CLEAR ANODIZED US 28 FINISH STANDARD, DURONIC US 40 FINISH AVAILABLE.

ALARM CONTROLS CORPORATION

"QUALITY SECURITY EQUIPMENT SINCE 1971"

19 BRANDYWINE DRIVE, P.O. BOX 280, DEER PARK, NEW YORK 11729

1 800 645-5538 631 586-4220 FAX 631 586-6500

EMAIL: INFO@ALARMCONTROLS.COM WWW.ALARMCONTROLS.COM