

MODEL TS-14

PNEUMATIC TIME DELAY



- SINGLE GANG 430 S.S. WALLPLATE
- LABELED *"PUSH TO EXIT"*
- TIME RANGE 2 SECONDS TO 60 SECONDS
- REPEATABILITY PLUS OR MINUS 10%
- ONE N/O AND ONE N/C CONTACT
- CONTACTS RATED 10 A. @120/240 VOLTS
- TIMER LIFE ONE MILLION CYCLES
- SWITCH TERMINATED WITH 10 INCH LEADS
- SWITCH DEPTH 2.25" BEHIND PLATE
- TEMPERATURE RANGE + 15F TO +120F
- U.L. LISTED & C.S.A. CERTIFIED COMPONENTS



ALARM CONTROLS CORPORATION
19 BRANDYWINE DRIVE DEER PARK, NY 11729

1 631 586-4220 1 800 645-5538
WWW.ALARMCONTROLS.COM EMAIL INFO@ALARMCONTROLS.COM

INSTALLATION INSTRUCTIONS

MODELS TS-14, TS-15, TS-16

PNEUMATIC TIME DELAY SWITCH


SPECIFICATIONS

CONTACT ARRANGEMENT: 1 N/O, 1 N/C

SWITCH RATING: 2 A. @ 35 VDC

TIME RANGE: 2 SECONDS TO 60 SECONDS
SET AT FACTORY TO TIME BETWEEN 2 AND 45 SECONDS

REPEATABILITY: + - 10%

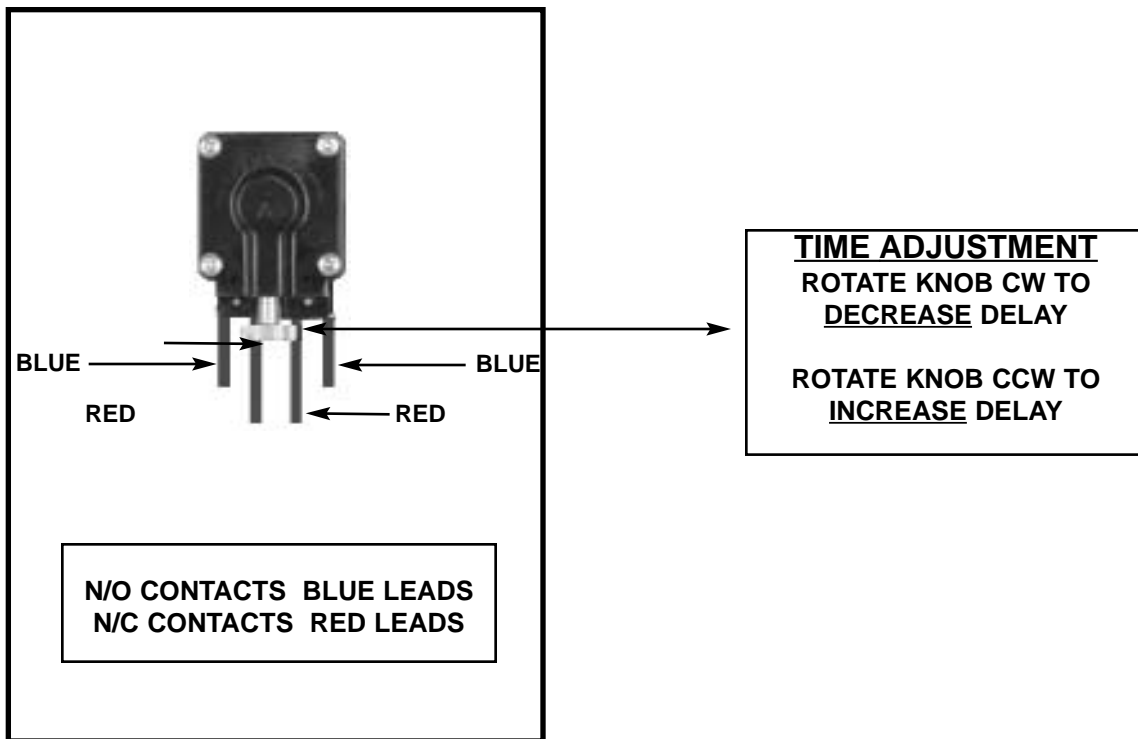

ALARM CONTROLS CORPORATION

19 BRANDYWINE DRIVE P.O. BOX 280

DEER PARK, NY 11729

PH: 1 800 645-5538 1 631 586-4220 FAX ; 1 631 586-6500

WWW.ALARMCONTROLS.COM EMAIL: INFO@ALARMCONTROLS.COM