# ES4300A

# Exit Alarm

For applications that require an alarmed exit device for emergency exit doors. The ES4300A is easy to install and operate. Features include: Intrusion/Tamper Alarm Output, Remote Reset/Bypass and Field Selectable Alarm Auto Reset that make the new ES4300A the Product of Choice.



ES4300A Series





# FEATURES AND BENEFITS


- Compatible with all access control systems
- Can be used as a stand alone product
- 12 or 24 VAC/VDC 200MA Operation
- 103 DB alarm sounder
- Easy installation
- Encourages employees to maintain access control procedures
- Reset/Bypass key switch and remote/ bypass input (adjustable rearm delay 0-20 sec.)
- Visual status indicator
- Tamper resistant
- Incorporates Form C Output relay
- Compact design- fits in a two gang enclosure



1402 Hawthorne St.
Bastrop, TX 78602
Voice: 1-800-272-3555
Fax: 512-321-9181
E-mail: dsi@dsigo.com

www.dsigo.com

# ES4300A Exit Alarm - Typical Application

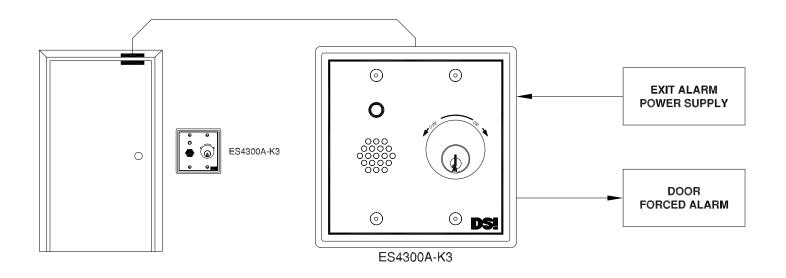

# **ELECTRICAL SPECIFICATIONS**

Power: 12 or 24 VCD/VAC @ 200MA Jumper Selectable

Local Control: Keyswitch for Unit Reset/Bypass

Control Input: N/O Remote Reset/Bypass

Control Output: Form C N/O & N/C Intrusion/

Tamper Alarm Status Remote LED

Adjustment: Alarm Auto Reset 0-60 sec. Shunt Delay

(Access/Lock Time) 0-20 sec.

Audible Alarm: 103 DB@3 feet

### MECHANICAL SPECIFICATIONS

Dimensions: 2 Gang Plate with All Key options

4.6"W x 4.5"H x 2.32"D

Keyswitch: Double Bit - Rim Hardware (with or without

Cylinder)

Finish: Painted - DSI Beige

Stainless Steel

# PRODUCT DESCRIPTION:

The ES4300A is used to monitor emergency exit doors. Typically located near the door, it monitors door position and activates a sounder and alarm contact when forced entry/exit occurs. Once triggered, the unit remains in alarm until the optional auto reset time expires or reset by the integral key switch or remotely through the dry contact.



1402 Hawthorne St.
Bastrop, TX 78602
Voice: 1-800-272-3555
Fax: 512-321-9181
E-mail: dsi@dsigo.com
www.dsigo.com