

ExitView®

www.honeywellvideo.com

HEIGHT STRIP CAMERA

Honeywell's ExitView height strip camera is a discreet and cost-effective solution for loss prevention, inventory shrinkage, and robbery. A high performance CCD camera within a height strip that can be mounted on or beside the door frame, ExitView captures the full face of the culprit at eye level, in full color, as they exit the premises.

ExitView is one of the most inexpensive solutions to tighten in-store security and make it easier to identify and prosecute criminals. With clear visual identification, prosecution of the offender and recovery of goods is easier than ever before.

ExitView represents the latest achievement in business protection that incorporated a CCD camera with a height strip. This value-priced surveillance solution is plug and play, making installation quick and easy.

Market Opportunities

The Honeywell ExitView is ideal for retail applications, banks, convenience stores, gas stations, malls, fast food restaurants, small businesses, cashier areas, and many other commercial enterprises.

Features

- High performance 1/3" CCD camera
- Functional height strip
- Available in silver or black, with or without the height strip markings, to blend with your decor
- Discreet, value-priced surveillance solution to prevent loss, inventory shrinkage, and robbery
- Plug and play installation
- For an extended field of view, an optional 15° angle adapter is available
- Comes pre-focused from the factory and includes a 12 VDC power supply
- Lens Type: 3.7mm fixed lens, F2.0





SPECIFICATIONS

| Operational | |
|---------------------------|--|
| Video Standard | NTSC |
| Scanning System | 525/60 Lines |
| Image Sensor | 1/3" CCD, 250k pixels |
| Number of Pixels (H x V) | 510 x 492 |
| Minimum Illumination | 0.9 lux @ F2.0 |
| Horizontal Resolution | 350 TV lines |
| Video Output | 1.0 Vp-p @75 Ohms |
| Sync System | Internal |
| S/N Ratio | 50 dB AGC Off |
| AGC Control | Auto (4-26 dB max) |
| Automatic Electronic Iris | 1/60 to 1,100,000 seconds |
| Auto White Balance | AWB |
| BLC | Automatic |
| Angle of View | 85° (D), 66° (H), 52° (V) |
| Electrical | |
| Input Voltage | Regulated 12 VDC power supply included (120 VAC input), UL Listed. |
| Input Range | ± 10% reverse polarity protected |
| Surge Suppression | 1.5 kW transient |
| Power Consumption | 1.8 W |
| Mechanical | |
| Dimensions (W x H x D) | 1.9" x 1.2" x 34.25" (48 mm x 29 mm x 870 mm) |
| Weight | 1.4 lb (0.65 kg) |
| Construction | Housing: Extruded aluminum Finish: Silver or black Front: Scratch coated acrylic |
| Connectors | Video Output: BNC connector Power Input: 2.1 mm male connector |
| Environmental | |
| Temperature | Operating: 14°F to 122°F (-10°C to 50°C) Storage: -4°F to 140°F (-20°C to 60°C) |
| Relative Humidity | 0° to 95°, non-condensing |

| Regulatory | |
|---------------------------|---------------------------|
| Emissions | FCC: Part 15, Class B |
| Safety | EU: 73/23/EEC LVD |
| Accessories | |
| HSSAM | 15° Angle Adapter, Silver |
| HSBAM | 15° Angle Adapter, Black |
| Power Supplies (Optional) | |
| HPTV3DC04 | 4 output, 3A, 12 VDC |
| HPTV5DC08 | 8 output, 5A, 12 VDC |
| HPTV5DC16 | 16 output, 5A, 12 VDC |

Note
This example shows the camera mounted on the inside wall as seen from the top.

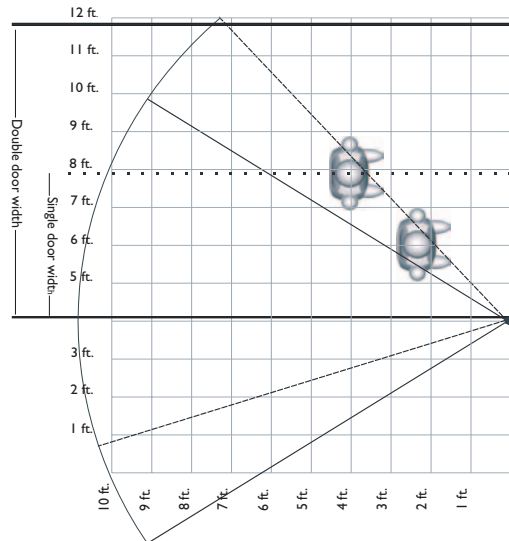

| Ordering | |
|----------|--|
| HSS37NB | ExitView 3.7 MM Lens, Silver, Black Window, NTSC |
| HSS37NS | ExitView 3.7 MM Lens, Silver, Height Strip, (Imperial Measurements) Window, NTSC |
| HSS37NM | ExitView 3.7 MM Lens, Silver, Height Strip, (Metric Measurements) Window, NTSC |
| HSB37NB | ExitView 3.7 MM Lens, Black, Black Window, NTSC |
| HSB37NS | ExitView 3.7 MM Lens, Black, Height Strip, (Imperial Measurements) Window, NTSC |
| HSB37NM | ExitView 3.7 MM Lens, Black, Height Strip, (Metric Measurements) Window, NTSC |

NOTE: Honeywell reserves the right, without notification, to make changes in product design or specifications.

Honeywell Security

Honeywell Video Systems
2700 Blankenbaker Pkwy, Suite 150
Louisville, KY 40299
1.800.796.CCTV
www.honeywell.com

L/EVIEW/D
April 2007
© 2007 Honeywell International Inc.