

## Electromagnetic Locks

**E-941SA-1200** 1,200-lb Holding Force, UL Listed

**E-941SA-1K2PQ** 1,200-lb Holding Force, with Bond Sensor, LED, UL Listed

**E-941SA-1K2PD** 1,200-lb Holding Force, with Bond Sensor, LED, Timer

### Features:

- ▶ Anodized aluminum housing (US 28).
- ▶ 12 or 24VDC (selectable).
- ▶ No residual magnetism.
- ▶ MOV surge protection.
- ▶ Adjustable mounting bracket.
- ▶ Complete mounting hardware for typical installations.
- ▶ "L" bracket and "Z" brackets available for easy mounting.
- ▶ Detachable faceplate.



**c UL us**  
**LISTED**  
(E-941SA-1200 &  
E-941SA-1K2PQ only)

### E-941SA-1K2PQ features:

- ▶ Built-in dual-colored status LED and bond sensor to show locking status:

Green	Door is closed and locked
Red	Door not closed and/or locked
Off	Door in use / No power

- ▶ Bond sensor relay: 3A@12VDC.

### E-941SA-1K2PD also features:


- ▶ Built-in timer, 1~78 seconds.

### Specifications:


		SA-1200	SA-1K2PQ	SA-1K2PD
Holding force		1,200-lb (545kg)		
Operating voltage		12 or 24 VDC ±10%		
Current draw	12VDC	500mA@12VDC		
	24VDC	250mA@24VDC		
Bond sensor relay		3A@12VDC		
Operating temperature		14°~131° F (-10°~55° C)		
Weight		11-lb (5kg)		
Bond sensor relay			●	●
Status LEDs			●	●
Built-in timer				●

### Dimensions:

#### Electromagnet

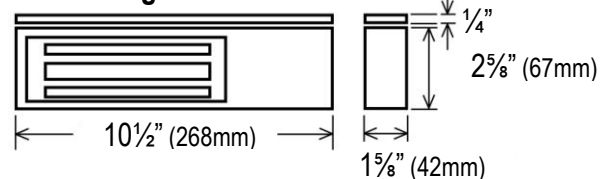

#### Armature Plate

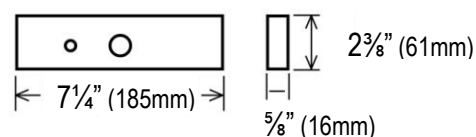

### Also Available from SECO-LARM:



**600-lb.  
Electromagnetic  
Locks**



**Double-Door  
Electromagnetic  
Locks**



**Gate Locks for  
Outdoor Use**