



## 16-Port Gigabit GREENnet Switch TEG-S16g(V1.0R)

The 16-Port Gigabit GREENnet Switch, model TEG-S16g, provides high bandwidth performance, ease of use, and reliability, all while reducing power consumption by up to 70%\*.

GREENnet technology automatically adjusts power voltage as needed, resulting in substantial energy savings. Embedded GREENnet technology works right out of the box with no management requirement.

Boost office network efficiency and eliminate network congestion with Gigabit speeds and a total switching capacity of 32Gbps with Full-Duplex mode. A built in universal power supply reduces cable clutter and diagnostic LEDs help with network troubleshooting. Plug and Play this sturdy metal switch for reliable high-speed network connectivity.

## FEATURES

- 16 x 10/100/1000Mbps Auto-MDIX Gigabit Ethernet ports
- On / off power switch
- Features a 32Gbps forwarding capacity
- Internal power supply reduces clutter
- GREENnet technology reduces power consumption when:
  - a. Ethernet port is not in use
  - b. Connected device is turned off
  - c. Connected device is in power-saving mode
  - d. Based on Ethernet cable length
- IEEE 802.3x Flow Control for full-duplex mode
- Back pressure Flow Control for half-duplex mode
- Store-and-Forward switching architecture with non-blocking wire-speed performance
- Integrated address look-up engine with an 8K MAC address table
- 2Mbits RAM data buffer
- Operates and maximizes packet filtering and forwarding rate
- Jumbo Frame support up to 9216Bytes
- Rackmount hardware included
- Sturdy metal housing
- Diagnostic LEDs and Plug & Play support
- 3-year limited warranty

\*Max power savings compared with standard TRENDnet switches.


# 16-Port Gigabit GREENnet Switch

TEG-S16g(V1.0R)

## SPECIFICATIONS

HARDWARE	
Standards	<ul style="list-style-type: none"><li>• IEEE 802.3 10Base-T; IEEE 802.3u 100Base-TX</li><li>• IEEE 802.3ab 1000Base-T; IEEE 802.3x Flow Control;</li></ul>
Network Media	<ul style="list-style-type: none"><li>• Ethernet: Cat. 5 up to 100 m</li><li>• Fast Ethernet: Cat. 5 and 5e up to 100 m</li><li>• Gigabit Ethernet: Cat. 5e and 6 up to 100 m</li></ul>
Data Rate	<ul style="list-style-type: none"><li>• Ethernet: 10Mbps/20Mbps (half/full-duplex)</li><li>• Fast Ethernet: 100Mbps/200Mbps (half/full-duplex)</li><li>• Gigabit Ethernet: 2000Mbps (full-duplex)</li></ul>
Protocol / Topology	<ul style="list-style-type: none"><li>• CSMA /CD, Star</li></ul>
Power Consumption	<ul style="list-style-type: none"><li>• 7.2 Watts (max.)</li></ul>
Switch Fabric	<ul style="list-style-type: none"><li>• 32Gbps</li></ul>
Interface	<ul style="list-style-type: none"><li>• 16 x 10/100/1000Mbps Auto-MDIX RJ-45 ports</li></ul>
Power Button	<ul style="list-style-type: none"><li>• On / off power button</li></ul>
Data RAM Buffer	<ul style="list-style-type: none"><li>• 2Mbits</li></ul>
Filtering Table	<ul style="list-style-type: none"><li>• 8K entries</li></ul>
Jumbo Frame Support	<ul style="list-style-type: none"><li>• Up to 9216Bytes</li></ul>
Diagnostic LED	<ul style="list-style-type: none"><li>• Power, Link/ACT, 100Mbps, 1000Mbps</li></ul>
Power	<ul style="list-style-type: none"><li>• 100~240VAC, 50/60Hz Internal universal switching power</li></ul>
Dimension	<ul style="list-style-type: none"><li>• 440 x 140 x 45 mm (17.4 x 5.5 x 1.8 in.)</li></ul>
Weight	<ul style="list-style-type: none"><li>• 1.6 kg (3.5 lbs.)</li></ul>
Temperature	<ul style="list-style-type: none"><li>• Operating: 0° ~ 40° C (32° ~ 104° F) Storage: -10° ~ 70° C (14° ~ 158° F)</li></ul>
Humidity	<ul style="list-style-type: none"><li>• Max. 90% (non-condensing)</li></ul>
Certifications	<ul style="list-style-type: none"><li>• CE, FCC</li></ul>

## NETWORKING SOLUTIONS

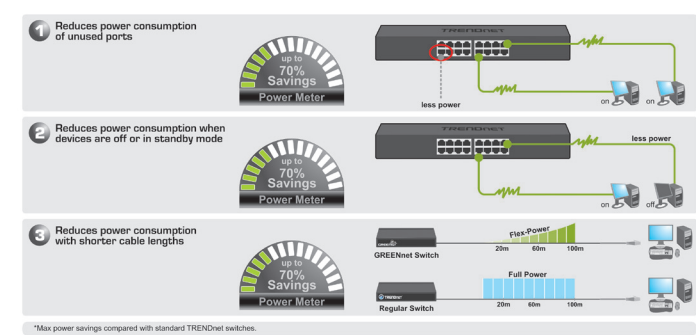

## PACKAGE CONTENTS

TEG-S16G
Multi-Language Quick Installation Guide
Power cord (1.8m / 6ft.)
Rackmount hardware

## RELATED PRODUCTS

TEW-639GR	300Mbps Wireless N Gigabit Router
TEW-S24g	24-Port Gigabit GREENnet Switch
TEG-PCITXR	Gigabit PCI Adapter

## CONTACT INFORMATION

**TRENDnet®**

20675 Manhattan Place, Torrance, CA 90501 USA  
Tel: 1-310-961-5500  
Fax: 1-310-961-5511  
Web: [www.trendnet.com](http://www.trendnet.com)  
Email: [sales@trendnet.com](mailto:sales@trendnet.com)  
**1-888-326-6061**

